



Cordless Pin Nailer PT001G



XGT
40V LI-ION
max

Firing quickness

about **20%**
UP



Work volume
on a single full battery charge

about
6,000 shots

Battery: BL4025



Quick firing thanks to BL motor




BL
MOTOR


Use of BL motor and redesigned driving spring shortens the time required to compress and release the spring, providing drastically quicker firing.

Firing quickness

about **20%**
UP

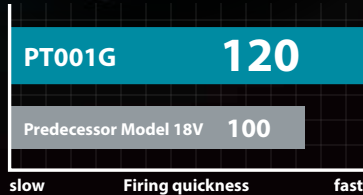


Beautiful finish

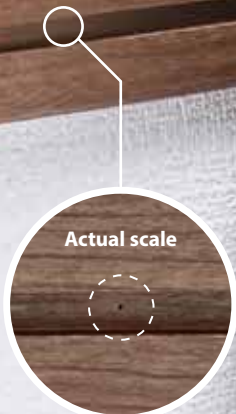


Improved Driver durability

achieved by redesigning the shape of the driver tip and reducing thin places.



Low recoil mechanism

- enables easier nailing of long pins without pushing down the pin nailer firmly.
- achieves high-quality finish nailing.

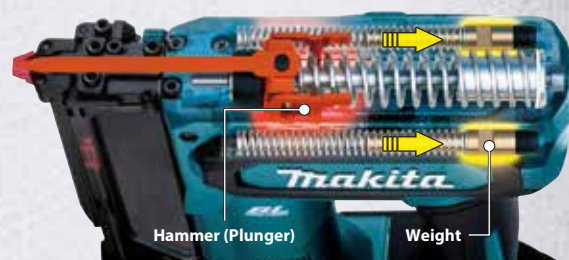

Work volume
on a single full battery charge
about **6,000** shots
Battery: BL4025

Pin nails
Diameter **Ø0.6 mm**

Length
15/18/25/30/35 mm

Compact & Lightweight



Net weight
2.4 kg
Battery: BL4025

Contact arm mechanism

enables "continuous nailing" and "drag nailing".
[If the nose tip isn't pressed to a workpiece, the trigger cannot be pulled.]





Nose tip (with Nose adapter)

thickness **4 mm**



Fires both vertically and horizontally

Nails can be fired in the groove of baseboard.



Ergonomically designed grip



Nose tip designed to provide better visibility

Single LED job light



with pre-glow and after-glow functions

Driving depth adjustment by dial




- Able to drive up to 35mm pin nails
- Anti-dry fire mechanism

XPT



eXtreme Protection Technology

High Power
Durability
Digital
Communication

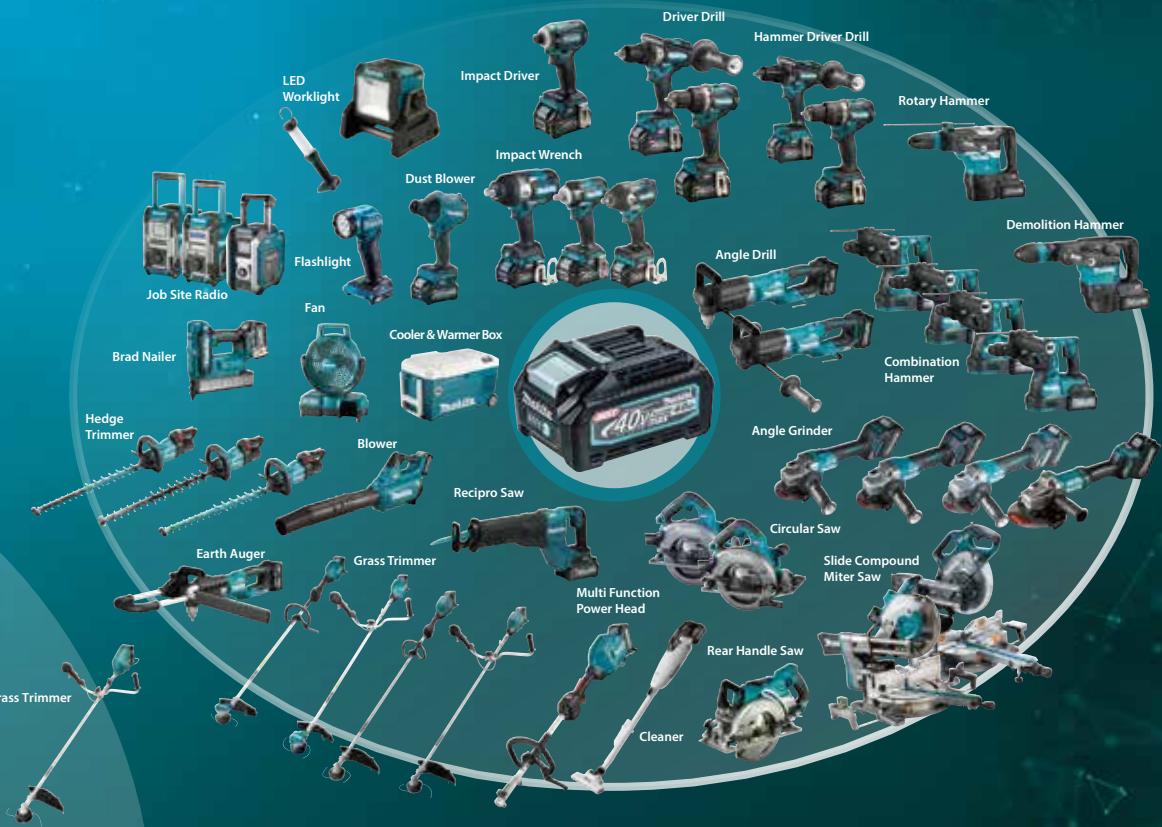

■ Cordless Pin Nailer Series

DPT353



PT354D



■ Accessories

Nose adapter

Part No. 422872-7

Nose adapter for flat nailing



■ Charging Time

40V L ^{ION} max	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Pin Nailer

PT001G

Depth Adjustment	Capacity	Length: 15, 18, 25, 30, 35 mm (5/8, 11/16, 1, 1-3/16, 1-3/8") Dia.: 0.6 mm (1/32") Gauge: 23 Ga
Auto Firing Stop	Magazine Capacity	120
Built-in Job Light	Approx. work volume on a full battery charge	6,000
Carrying Case	Vibration Level	2.5 m/s ² or less
	Sound Pressure Level	79 dB(A)
	Dimensions (L x W x H)	w/ BL4020 / BL4025: 265 x 86 x 226 mm (10-3/8 x 3-3/8 x 8-7/8")
	Net weight	2.4 - 3.0 kg (5.3 - 6.6 lbs.)

Standard Equipment : Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202201