

AIR TOOLS

AUTOMOTIVE & GENERAL INDUSTRY

INDEX

Impact Drivers 02

Drivers 02

Ratchets Wrenches 02

Impact Wrenches 3/8"~3/4" 03-04

Impact Wrenches 1"~1/2" 05-06

Angle Grinders and
Straight Grinders 07-08

Die Grinders 09

Drills 10


Scaling Hammers 11

Needle Scalers 11

Hammers 12

Flux Chippers 12

Sanders 13




Impact Drivers / Drivers Ratchet Wrenches




MID-8P 1/4"Hex

- 2 hammer(Pin-less)clutch
- 2 steps throttle for precise control
- 360 free rotating handle exhaust
- Well balanced Ergonomic design
- One handed easy reverse switch
- Ideal for wood work and assembly work
- 3/8 SQ.drive model available(MID-8P(R) 3/8SQ)

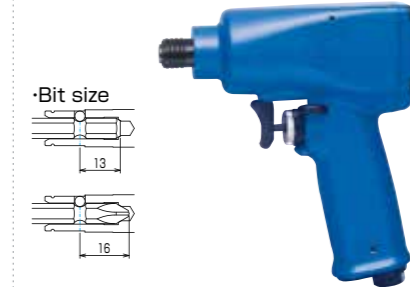


MI-12D 1/4"Hex

- Twin hammer clutch
- Tease throttle for precise control
- Handle Exhaust directs air away from an operator
- Well balanced Ergonomic design
- 4 Positions regulator
- Elastomer handle grip
- 3/8 SQ.drive model available (MID-12P 3/8SQ)
- Ideal for wood work and assembly work




MID-60 1/4"Hex

- Ideal for motor vehicle and light assembly work

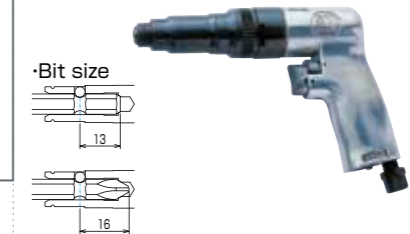

MV-6226 1/4"Hex

- Ideal for furniture,wood working, motor vehicle and other assembly operations



MV-6216 1/4"Hex

- Ideal for appliance,electronics and other light assembly industries



MR-2310B 3/8"SQ
MR-2410B 1/2"SQ

- Easy grip handle Quick run down capacity
- Ideal for usage on pumps, radiators, small engines exhaust systems etc.



MR-2207C 1/4"SQ
MR-2209C 3/8"SQ

- Compact and powerful
- Rubber covered ratchet head
- Durable ratchet head (heat treated) prevents slipping
- Ideal for confined working conditions

Impact Drivers Specifications: Air pressure 6kg/cm²

| MODEL | Drive (in) | Bolt Size (mm) | Net Weight (kg) | Overall Length (mm) | Center Height (mm) | Free Speed (rpm) | Air Cons | | Air Inlet (PT) | Hose Size (in) |
|--------|------------|----------------|-----------------|---------------------|--------------------|------------------|----------------------------|----------------------------|----------------|----------------|
| | | | | | | | Free (m ³ /min) | Load (m ³ /min) | | |
| MID-8P | H 1/4 | 8 | 1.0 | 154 | 22.5 | 10500 | 0.55 | 0.4 | 1/4 | 1/4 |
| MI-12D | H 1/4 | 12 | 1.2 | 154 | 25.3 | 9500 | 0.50 | 0.4 | 1/4 | 1/4 |
| MID-60 | 1/4 | 6 | 0.8 | 181 | 55 | 10800 | 0.48 | 0.32 | 1/4 | 3/8 |

Drivers and Ratchet Wrenches Specifications: Air pressure 6kg/cm²

| MODEL | Drive (in) | Bolt Size (mm) | Torque Range (kg·m) | Net Weight (kg) | Overall Length (mm) | Free Speed (rpm) | Air Cons (m ³ /min) | Air Inlet (PT) | Hose Size (in) |
|----------|------------|----------------|---------------------|-----------------|---------------------|------------------|--------------------------------|----------------|----------------|
| MV-6216 | H1/4 | 6 | 0.4-0.9 | 1.2 | 250 | 1800 | 0.42 | 1/4 | 1/4 |
| MV-6226 | H1/4 | 6 | 0.5-1.2 | 1.3 | 205 | 1800 | 0.6 | 1/4 | 1/4 |
| MR-2207C | 1/4 | 8 | 0.6-2.8 | 0.53 | 165 | 250 | 0.35 | 1/4 | 1/4 |
| MR-2209C | 3/8 | 8 | 0.6-2.8 | 0.53 | 165 | 250 | 0.35 | 1/4 | 1/4 |
| MR-2310B | 3/8 | 10 | 1.4-7.0 | 1.13 | 254 | 180 | 0.45 | 1/4 | 1/4 |
| MR-2410B | 1/2 | 10 | 1.4-7.0 | 1.13 | 254 | 180 | 0.45 | 1/4 | 1/4 |