


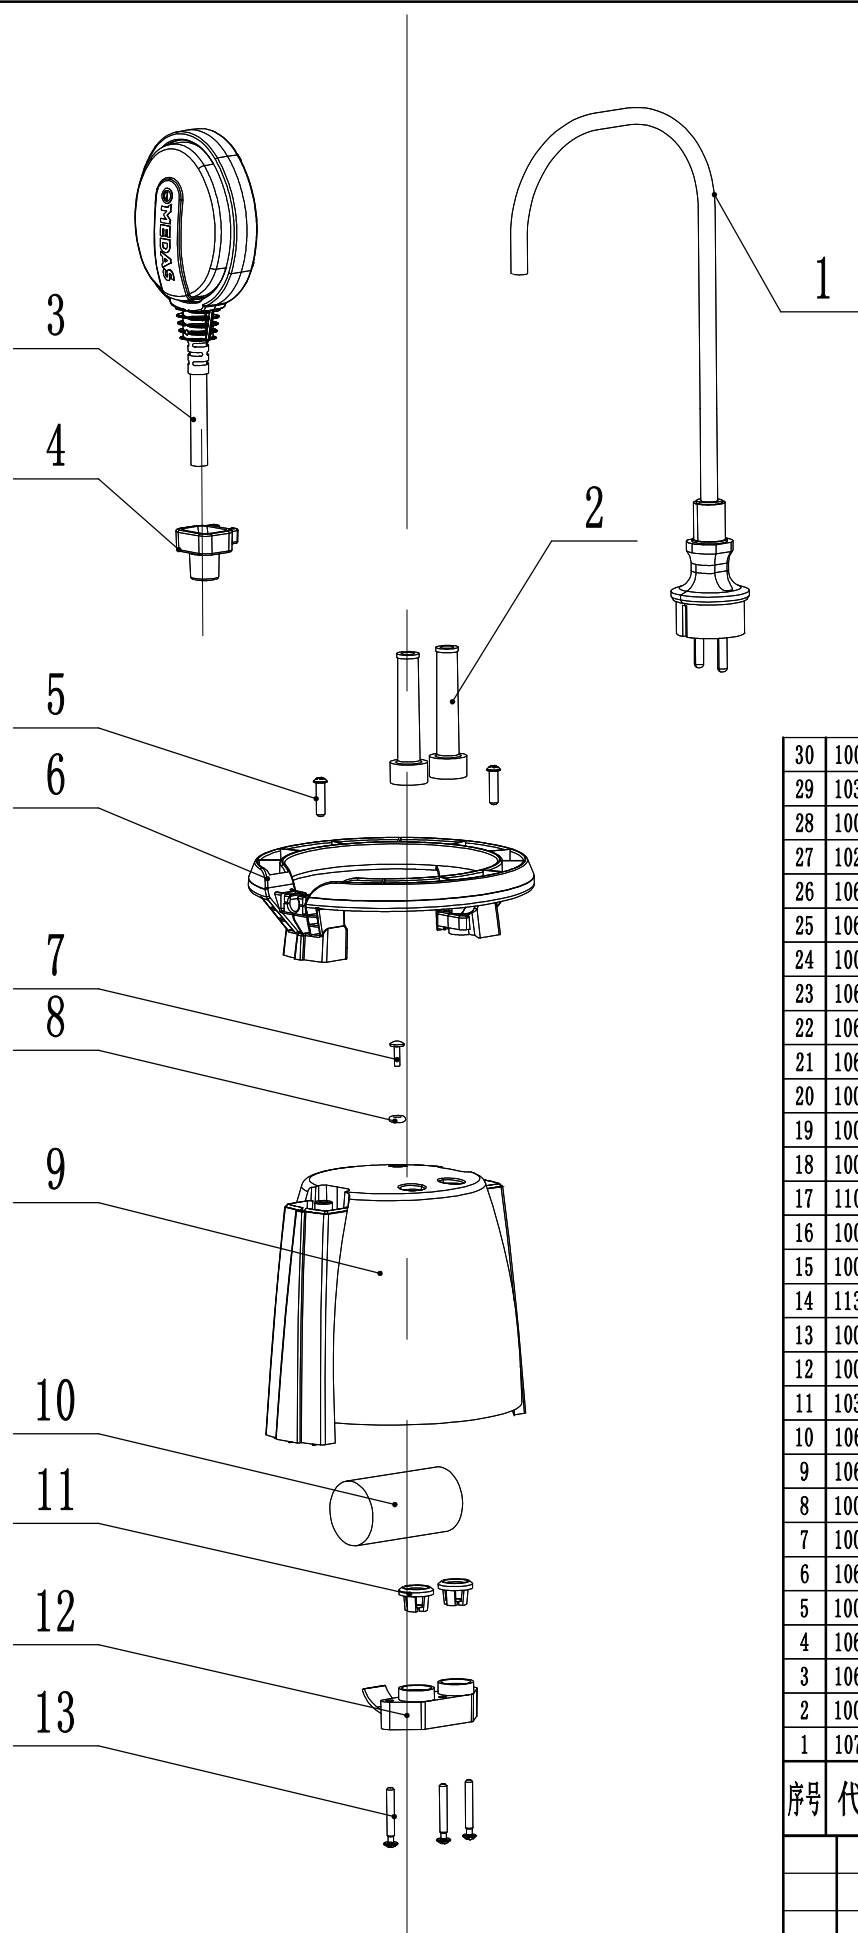

30	100021	1-1/4弯头	elbow adaptor	PA+GF30		1		
29	103208	1-1/4管接密封	adaptor seal	NBR220	Φ36.8 (内径)*Φ3.1 (截径)	2		
28	100022	1-1/4直管	straight adaptor	PA+GF30		1		
27	102028	十字槽盘头高峰螺钉	screw	SUS 304	ST4*15	1		
26	106367	MC 250 E 污底座	dirty water base	PP+20GF	167 * 160 * 57	1		
25	106366	MC 250 E 清底座	Clear water base	PP+20GF	167 * 160 * 35	1		
24	100423	十字槽盘头高峰螺钉	screw	ST4*20	ST4*20	6		
23	106365	MC 250 E 低吸底座-小圆孔	Low suction base	PP+20GF	166 * 160 * 36	1		
22	106364	MC 250 E中间体	middle part	PP+20GF	165 * 166 * 147	1		
21	106529	Φ2.8mm 低吸底座密封	low suction base seal	NBR220	Ø138(内)*Ø2.8(截), 含胶量40-45%	1		
20	100429	入字槽盘头高峰螺钉	screw	SUS 304	ST4. 6*35	3		
19	100344	M8防松螺母	locknut	SUS 304	M8防松	1		
18	100807	主密封	main seal	NBR220	Ø89.5(内径)*Ø5.2, 含胶量55-60%	1		
17	110563	B2D75. 4H25叶轮	impeller	PA6+20GF	B2D75. 4H25	1		
16	100472	Ø8不锈钢垫片	impeller adjusting gasket	SUS 304	Ø8*Ø16*1.5	1		
15	100856	骨架油封	Skeleton oil seal		Ø24*Ø11*4.5; 含胶量55-60%	3		
14	113634	铝电机 (MC 250 E舒适款)	aluminum motor	aluminum?	90-D25-L155.5mm, 塑料后盖	1		
13	100398	十字槽盘头自攻螺钉	screw	galvanized	ST3. 9*30	3		
12	100018	电容压扣	capacitor clip	PA6+20GF		1		
11	103850	H05线四齿线爪	four-tooth thread claw	PA+GF30	H05线用	2		
10	106911	6uF电容 (双峰)	capacitor	P0	450VAC 6uF, Ø35*50; 有CE标识	1		
9	106385	MC 250 E 主体 (含印刷MDS logo)	main body	PP高光+20GF	银白色油墨印刷 ‘MDS’ Logo	1		
8	100804	气检螺丝密封	leakage test screw seal	NBR220	Ø6 (外径)*Ø1.9, 含胶量50%	1		
7	100397	气检螺钉	leakage test screw	SUS 304	ST3. 5*11.5	1		
6	106368	MC 250 E 圆把手-H05线	round handle	K8003	146 * 148 * 52, 固定H05导线;	1		
5	100414	十字槽盘头高峰螺钉	screw	SUS 304	ST4. 6*15	2		
4	106928	MC 250 E浮子固定夹 (黑色)	float clamp	PP+20GF	28 * 27 * 27	1		
3	106933	鸭蹼款H05导线16 (6) A 黑色浮子开关总成	float swtich assembly		模具同 ‘106400’ ;	1		
2	100864	电缆护套	cable sleeve	NBR220	70*Ø20*Ø6.8, 含胶量50%	2		
1	107261	9.8mH05带CS插头 (带两小平面) 电缆	power cable with plug	橡胶电缆	滑石粉+纸工艺, H05 RN-F3G0.75mm2	1		
序号	代号	中文名	英文名	材料	规格	数量	备注	
		名称						
标记	处数	分区	更改文件号	签名	年、月、日			
设计	张早早	240311	标准化			阶段标记	重量	比例
								1:1
审核			审定					10474
工艺			批准			共 张	第 张	