

# HAND TOOLS & MECHANIC TOOLS

## 3pc Pre-heater plug puller set ชุดเครื่องมือทำความสะอาดหัวเผาแบบ 3 ชิ้น

**FORCE**

ฟอร์ซ

- To ream out and clean the bore between the glow plug and pre-combustion chamber.
- Application : pre-heater plugs with 10mm, glow plug 6 and 7mm.



KT Code	Model	Weight (g)	Price
F131-903G16	903G16	570	

## Glow plug removal and puller set ชุดเครื่องมือถอดหัวเผาเครื่องยนต์ 27 ชิ้น

**FORCE**

ฟอร์ซ

- Simplifies the assembly and disassembly and professional repair of glow plug thread.
- Suitable for most injectors.
- Assembly and disassembly of glow plugs and repair glow plug threads.
- Extractor for fixed glow plugs.
- Step drill to drill out damaged glow plugs 7 x 5.5 mm and 9 x 5.5 mm.
- Taps M8 x 1.0, M10 x 1.0 and 1/4"-28UNF for repairing glow plug threads.
- Tap holder.
- E10 socket.



KT Code	Model	Weight (g)	Price
F131-927G3	927G3	1750	

## 1/4"DR. Glow plug impact socket set ชุดปืนลม 1/4" ถอดหัวเผาเครื่องยนต์ดีเซล

**FORCE**

ฟอร์ซ

- A torque air impact wrench set and designed for the diesel engine glow plugs which hard to removal.
- Special long-reach 8 mm, 9 mm 10 mm, 11 mm and 12 mm sockets for ease of access.
- Also includes: short and long extension, universal joint and special 1/4" air impact wrench.



KT Code	Model	Weight (g)	Price
F131-909G6	909G6	1850	

## Injector sealing seat cleaning & milling set ชุดเครื่องมือทำความสะอาดหัวฉีดซิลกันรั่ว

**FORCE**

ฟอร์ซ

- This is the optimized version of the cleaning and milling tool set.
- The advantages are clearly obvious.
- Can be used with HDI engines, diesel direct injection and common rail engines with BOSCH and DELPHI injectors.
- Shaft cleaning by brushes with machine drive, sealing seat cleaning with cutter 120° Ø21mm; 17mm stepped, miller 0° Ø17mm continuous, miller 0° Ø19mm; 17.0mm; 15.0mm stepped.



KT Code	Model	Weight (g)	Price
F131-921G2	921G2	1700	

## 9pc Pre-heater plug tools ชุดเครื่องมือทำความสะอาดหัวเผาแบบ 9 ชิ้น

**FORCE**

ฟอร์ซ

- To ream out and clean the bore between the glow plug and pre-combustion chamber.
- Size: M12 x 1.25, M10, pre-heater plugs with 10mm across ats.
- Fasten the glow plug with the correct torque
- 1/4" DR. universal socket size: 8, 9, 10, 12 mm



Thread Diameter	Tightening Torque
8mm	8-15Nm(0.8-1.5Kgm)
9mm	15-20Nm(1.5-2.0Kgm)
10mm	15-20Nm(1.5-2.0Kgm)
12mm	20-25Nm(2.0-2.5Kgm)


KT Code	Model	Weight (g)	Price
F131-K909G4	K909G4	1650	

## Valve spring compressor ซีแคมบิกคสปริงวาล์ว

**FORCE**

ฟอร์ซ

- For large engines, most suitable for commercial vehicles and general garage use.
- Jaw opening 70-200mm, Throat clearance 250mm.

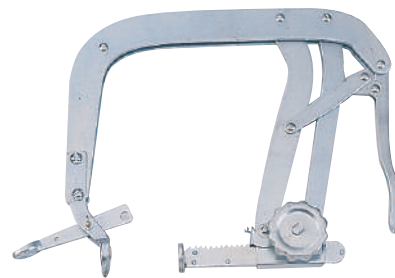

KT Code	Model	Weight (g)	Price
F131-62101	62101	3300	